

## **EAGLE LONG WAVE INFRARED DETECTOR**

**SELEX Galileo designs, develops and manufactures InfraRed (IR) detectors at its dedicated facility in Southampton, UK. With a reputation for providing customers with the best in high performance and cost-effective technology for IR camera systems, SELEX Galileo offers a unique level of expertise.**

The Eagle Long Wave InfraRed (LWIR) detector is a 640 x 512 Mercury Cadmium Telluride (MCT) Integrated Detector Cooler Assembly (IDCA). The Eagle LWIR detector is designed for very high performance imaging in the 8 - 10 $\mu$ m waveband.

Using the SELEX Galileo MCT process, the Eagle LWIR detector provides the highest environmental integrity along with the superior performance of focal plane detectors.

### **MAIN FEATURES**

- Snapshot or rolling readout operation
- Simple to use
- Long Wave (LW) 8-10 $\mu$ m
- High electro-optic performance with low crosstalk, automatic anti-blooming at the pixel level and excellent sensitivity
- Windowing gives enhanced frame rates over selected areas of the array
- Highest LW technology performance available in the world
- Longest LW technology DRI ranges
- Reduced stare time, less motion blur than QWIP detectors
- High performance in low scene temperature.

### **KEY BENEFITS**

- Low cost
- High resolution
- High frame rate
- High sensitivity.

## Eagle Long Wave Infrared Detector



Detector analysis and testing facilities

### TECHNICAL SPECIFICATIONS

#### Format

Array	640 x 512 pixels
Pixel Pitch	24µm
Active Area	15.36mm x 12.29mm

#### Typical Performance

NETD (median)	24mK
Pixel Operability	>99.5%
Signal Uniformity ( $\sigma$ /median)	<5%

#### Array Multiplexer



Operating Waveband	8 - 10µm
Scan Format	Snapshot or rolling readout
Output Dynamic Range	2.2V
Pixel Integration Capacitor	0.8pF
Charge Capacity	$1.9 \times 10^7$ electrons
Number of Outputs	4
Pixel Rate	Up to 10MHz per output
Output Impedance	80 ohms
Technology	CMOS
Intrinsic MUX Noise	50µV rms
Operating Temperature	Up to 90K
Max. Operating Voltage	7V
Power Consumption	40mW
Minimum Pads for Operation	13
Input Clock1	

#### IDCA

Weight	< 850g
Power Consumption	<10W steady state
Cooling Engine	Rotary Stirling engine
Operating Temperature Range	-45 °C to +70 °C

#### Linear Cooler

Weight (including cooler)	<1100g
Power Consumption	<15W steady state
Cooling Engine	Linear Stirling engine
Operating Temperature Range	-45 °C to +70 °C

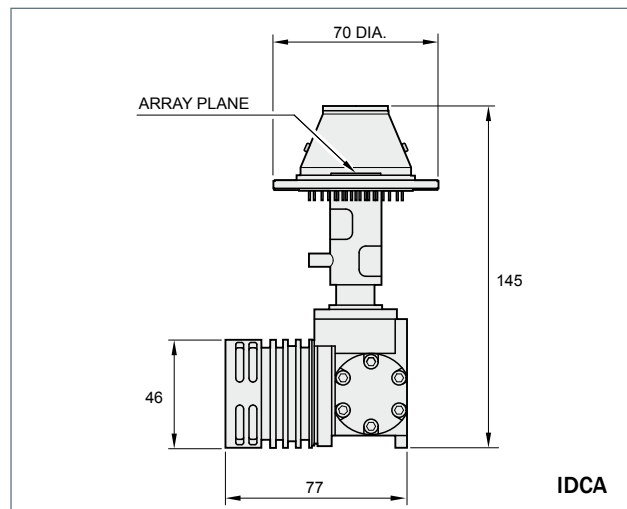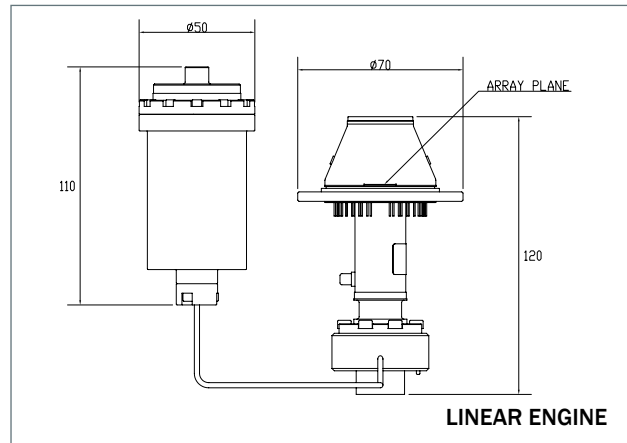

For more information please email [infrared.sales@selexgalileo.com](mailto:infrared.sales@selexgalileo.com)

SELEX Sensors and Airborne Systems Infrared Limited, A Finmeccanica Company

PO Box 217, Millbrook Industrial Estate, Southampton, Hampshire, SO15 0EG, United Kingdom, Tel: +44 (0) 23 8070 2300, Fax: +44 (0) 23 8031 6777

This publication is issued to provide outline information only and is supplied without liability for errors or omissions. No part of it may be reproduced or used unless authorised in writing.

We reserve the right to modify or revise all or part of this document without notice.

2009 © Copyright SELEX S&AS Ltd.

[www.selexgalileo.com](http://www.selexgalileo.com)

SELEXGALILEO\UK\Dsh-070\030901\mjg